


# Panama 3 PVLX


Open semi vertical . Remote



# H150

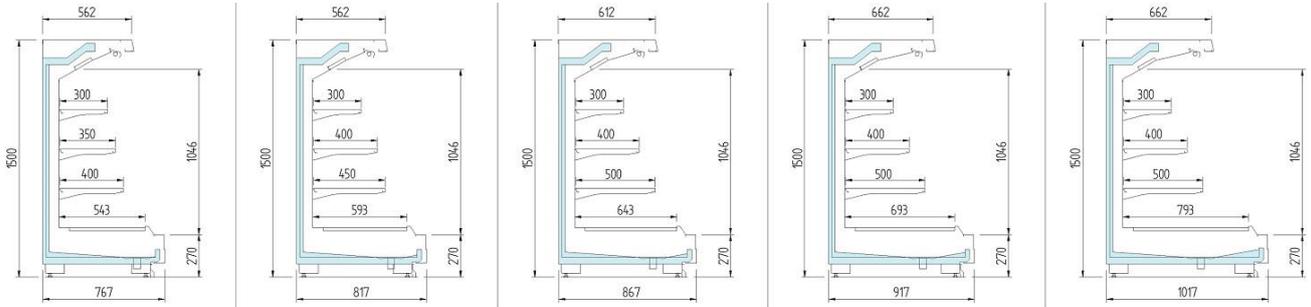

# H165

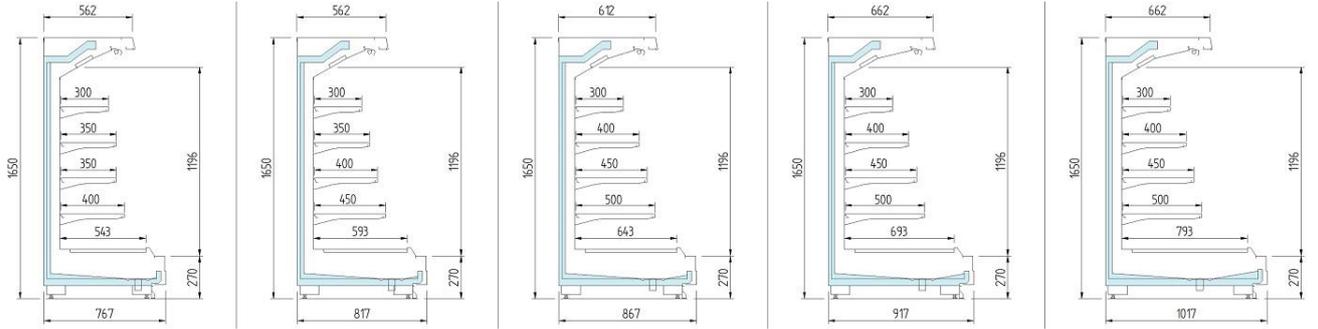

Panama 3 PVLX (Cabinet)					
<b>Length without ends</b>	<b>mm</b>	<b>1250</b>	<b>1875</b>	<b>2500</b>	<b>3750</b>
<b>Height</b>	<b>cm</b>	150   165	150   165	150   165	150   165
<b>Depth</b>	<b>cm</b>	75   80   85   90   100	75   80   85   90   100	75   80   85   90   100	75   80   85   90   100
<b>Working Temperature</b>	-1 / +1	•	•	•	•
	0 / +2	•	•	•	•
	+2 / +4	•	•	•	•

Panama 3 PVLX (Headcase)						
<b>Length with ends</b>	<b>mm</b>	<b>1600</b>	<b>1775</b>	<b>1975</b>	<b>2183</b>	<b>2600</b>
<b>Height</b>	<b>cm</b>	150   165	150   165	150   165	150   165	150   165
<b>Depth</b>	<b>cm</b>	75   90	75   90	75   90	75   90	75   90
<b>Working Temperature</b>	-1 / +1	•	•	•	•	•
	0 / +2	•	•	•	•	•
	+2 / +4	•	•	•	•	•

Information related to energy class (Ecodesign Regulation 2019/2024 and Energy Labelling Regulation 2019/2018) refers to specific product configurations. All configurations other than that presented in the website could require significantly different energy class information. For further details, either consult the European Product Database for Energy Labelling (EPREL) or contact our sales office.

